

SANS / Glass

WALL

Sans Glass builds on the Direct master, with a long, slender piece of slumped glass set over the 16 mm line of light, almost like a piece of jewellery. Hand-crafted in Melbourne, the glass is structured for strength and softly textured from within, so the light comes through even and gentle. Three glass finishes: Soft Clear, Soft Grey and Soft Bronze.
The glass is held at each end by a wafer-thin rectangular fastener, fixed from the back and released only with a tool, so the fitting is tamper-proof. The glass can be replaced without removing the fitting. Remote driver, installs in any orientation. IP44, suited to bathrooms, kitchens, covered outdoor areas, hotels and hospitality.

MADE IN MELBOURNE, AUSTRALIA

MATERIAL FINISHES

GLASS	○ Soft Clear	Soft Grey	Soft Bronze	
BODY	Black Ace	Brick Speckle	Bronze	Deep Blue
	Deep Green	○ Flat White	Iron Grey	Merlot
	Sandstone	Silver Grey		

LIGHT SOURCE

COLOUR TEMPERATURE (CCT)	2700K - Warm White 3000K - Natural White 3500K - Mid White
CONTROL (REMOTE)	Non Dimmable Phase Dimmable (Standard) Dali Dimmable
LAMP	LED Strip - Constant Voltage
POWER	Sans 450 Glass - 5.40 Watts (24VDC) Sans 600 Glass - 7.20 Watts (24VDC) Sans 750 Glass - 9.00 Watts (24VDC)
OUTPUT	Sans 450 Glass - 400 Lumens Sans 600 Glass - 550 Lumens Sans 750 Glass - 700 Lumens
LED LIFE	50,000 Hours
LED SET UP	Direct
COLOUR RENDERING INDEX (CRI)	90+

PHYSICAL

DIMENSIONS	Sans 450 Glass - 500mm H x 47mm W x 56mm D Sans 600 Glass - 650mm H x 47mm W x 56mm D Sans 750 Glass - 800mm H x 47mm W x 56mm D
WEIGHT	Sans 450 Glass - 0.70kg Sans 600 Glass - 0.85kg Sans 750 Glass - 1.00kg
MOUNTING	Bracket

COMMERCIAL

LEAD TIME	6 Weeks
WARRANTY	3 Year Manufacturers Warranty
INSTALLATION	Licensed Electrician


CERTIFICATION

AU/NZS	AU/NZS 60598.1, 60598.2.1
INGRESS PROTECTION (IPXX)	Up to IP44

Controlling Driver is Remote. Luminaire is DC SELV, **NOT 240VAC**.

CARE	Ensure luminaire is powered off. Remove dust with a soft dry cloth. Avoid solvents or abrasive materials when cleaning.

SANS / Glass

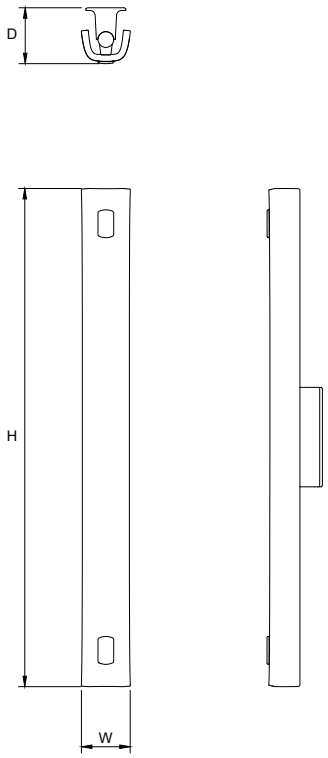

MEASUREMENT	SANS 450	SANS 600	SANS 750
HEIGHT - H	500mm	650mm	800mm
WIDTH - W	47mm	47mm	47mm
DEPTH - D	56mm	56mm	56mm
WEIGHT	0.70kg	0.85kg	1.00kg



SANS / Direct

WALL

Sans takes its name from sans serif typefaces, which do without ornament and carry their character in the finest details. A 16 mm line of light runs unbroken from end to end and faces out into the room, giving a clean, high-quality output for bathroom vanities and task lighting. Up close, every element is purposeful, and the way each part meets the next carries a level of resolution that sets it apart.

A remote driver keeps the profile fine, with all servicing at a backplate concealed behind the fitting. Grub screws make it tamper-proof, and the lightweight fitting installs in any orientation. IP44, suited to bathrooms, kitchens, covered outdoor areas, hotel corridors and hospitality.

MADE IN MELBOURNE, AUSTRALIA

MATERIAL FINISHES

BODY	Black Ace	Brick Speckle	Bronze	Deep Blue
	Deep Green	Flat White	Iron Grey	Merlot
	Sandstone	Silver Grey		

LIGHT SOURCE

COLOUR TEMPERATURE (CCT)	2700K - Warm White 3000K - Natural White 3500K - Mid White
CONTROL (REMOTE)	Non Dimmable Phase Dimmable (Standard) Dali Dimmable
LAMP	LED Strip - Constant Voltage
POWER	Sans 450 Direct - 5.40 Watts (24VDC) Sans 600 Direct - 7.20 Watts (24VDC) Sans 750 Direct- 9.00 Watts (24VDC)
OUTPUT	Sans 450 Direct - 400 Lumens Sans 600 Direct - 550 Lumens Sans 750 Direct - 700 Lumens
LED LIFE	50,000 Hours
LED SET UP	Direct
COLOUR RENDERING INDEX (CRI)	90+

PHYSICAL

DIMENSIONS	Sans 450 Direct - 450mm H x 40mm W x 40mm D Sans 600 Direct - 600mm H x 40mm W x 40mm D Sans 750 Direct- 750mm H x 40mm W x 40mm D
WEIGHT	Sans 450 Direct - 0.21kg Sans 600 Direct - 0.23kg Sans 750 Direct - 0.25kg
MOUNTING	Bracket

COMMERCIAL

LEAD TIME	6 Weeks
WARRANTY	3 Year Manufacturers Warranty
INSTALLATION	Licensed Electrician


CERTIFICATION

AU/NZS	AU/NZS 60598.1, 60598.2.1
INGRESS PROTECTION (IPXX)	Up to IP44

Controlling Driver is Remote. Luminaire is DC SELV, **NOT 240VAC**.

CARE	Ensure luminaire is powered off. Remove dust with a soft dry cloth. Avoid solvents or abrasive materials when cleaning.

SANS / Direct

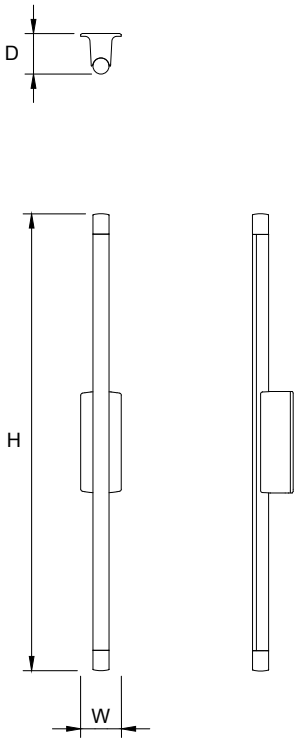

MEASUREMENT	SANS 450	SANS 600	SANS 750
HEIGHT - H	450mm	600mm	750mm
WIDTH - W	40mm	40mm	40mm
DEPTH - D	40mm	40mm	40mm
WEIGHT	0.21kg	0.23kg	0.25kg



SANS / Indirect

WALL

Sans takes its name from sans serif typefaces, which do without ornament and carry their character in the finest details. A 16 mm line runs unbroken from end to end, with the light facing the wall on either side of the bracket for ambient light in living areas, bedrooms and hallways. Up close, every element is purposeful, and the way each part meets the next carries a level of resolution that sets it apart.

A remote driver keeps the profile fine, with all servicing at a backplate concealed behind the fitting. Grub screws make it tamper-proof, and the lightweight fitting installs in any orientation. IP44, suited to bathrooms, kitchens, covered outdoor areas, hotel corridors and hospitality.

MADE IN MELBOURNE, AUSTRALIA

MATERIAL FINISHES

BODY	Black Ace	Brick Speckle	Bronze	Deep Blue
	Deep Green	Flat White	Iron Grey	Merlot
	Sandstone	Silver Grey		

LIGHT SOURCE

COLOUR TEMPERATURE (CCT)	2700K - Warm White 3000K - Natural White 3500K - Mid White
CONTROL (REMOTE)	Non Dimmable Phase Dimmable (Standard) Dali Dimmable
LAMP	LED Strip - Constant Voltage
POWER	Sans 450 Indirect - 5.40 Watts (24VDC) Sans 600 Indirect - 7.20 Watts (24VDC) Sans 750 Indirect- 9.00 Watts (24VDC)
OUTPUT	Sans 450 Indirect - 400 Lumens Sans 600 Indirect - 550 Lumens Sans 750 Indirect - 700 Lumens
LED LIFE	50,000 Hours
LED SET UP	Indirect
COLOUR RENDERING INDEX (CRI)	90+

PHYSICAL

DIMENSIONS	Sans 450 Indirect - 450mm H x 40mm W x 40mm D Sans 600 Indirect - 600mm H x 40mm W x 40mm D Sans 750 Indirect - 750mm H x 40mm W x 40mm D
WEIGHT	Sans 450 Indirect - 0.21kg Sans 600 Indirect - 0.23kg Sans 750 Indirect - 0.25kg
MOUNTING	Bracket

COMMERCIAL

LEAD TIME	6 Weeks
WARRANTY	3 Year Manufacturers Warranty
INSTALLATION	Licensed Electrician


CERTIFICATION

AU/NZS	AU/NZS 60598.1, 60598.2.1
INGRESS PROTECTION (IPXX)	Up to IP44

Controlling Driver is Remote. Luminaire is DC SELV, **NOT 240VAC**.

CARE	Ensure luminaire is powered off. Remove dust with a soft dry cloth. Avoid solvents or abrasive materials when cleaning.

SANS / Indirect

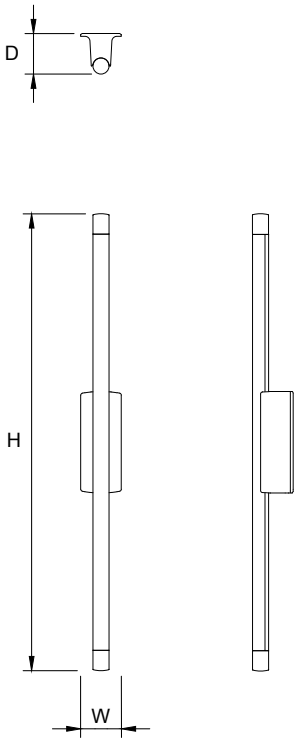

MEASUREMENT	SANS 450	SANS 600	SANS 750
HEIGHT - H	450mm	600mm	750mm
WIDTH - W	40mm	40mm	40mm
DEPTH - D	40mm	40mm	40mm
WEIGHT	0.21kg	0.23kg	0.25kg